
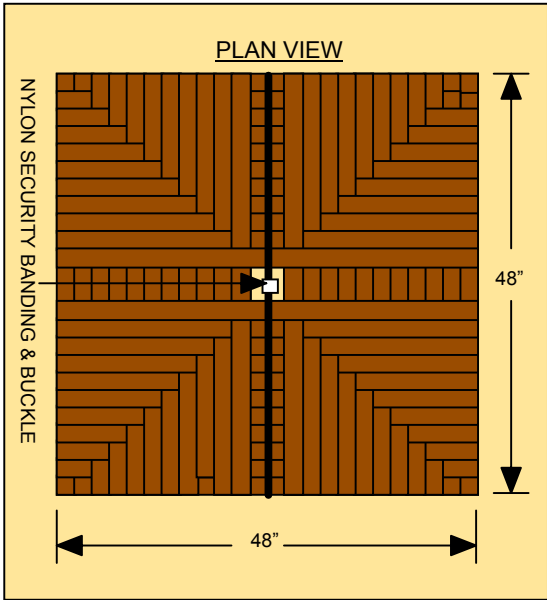
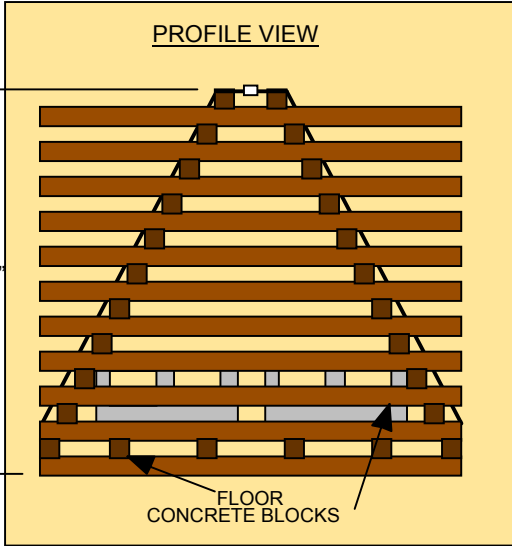


**PENNSYLVANIA PORCUPINE CRIB**  
**STANDARD DRAWING**  
 REVISED VERSION

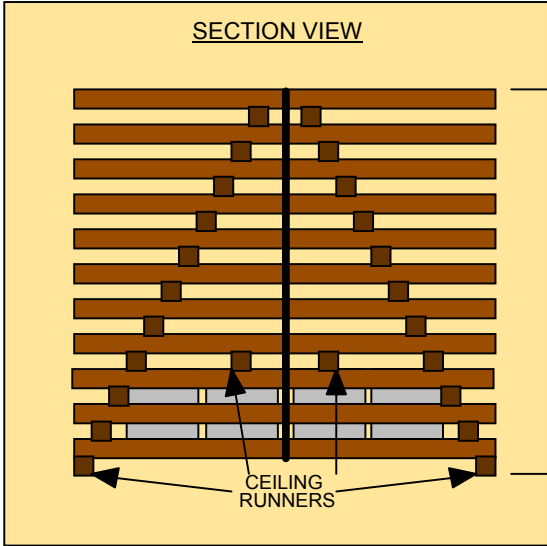

MATERIALS & NOTES

**MATERIALS:**  
 ROUGH CUT HEMLOCK LUMBER 2"x2"x4'-50 PCS.  
 8"x8"x16" 2 CORE CONCRETE BLOCKS - 8  
 16D COMMON NAILS - 2 LBS. (OR 2 STRIPS OF 12D)  
 1/2" NYLON BANDING - 18" (1 STEEL BUCKLE)

**NOTES:**  
 LUMBER MUST BE TRUE DIMENSIONAL..  
 LUMBER MUST BE GREEN (FRESH CUT).  
 YELLOW POPLAR MAY BE SUBSTITUTED FOR  
 HEMLOCK.  
 CONCRETE BLOCKS MINIMUM WEIGHT: 35 LBS..  
 NYLON BANDING: 600 LBS TENSILE STRENGTH.